

Technical specifications


Alkaline

Pro Power

Panasonic Typical Dimensions



LR6

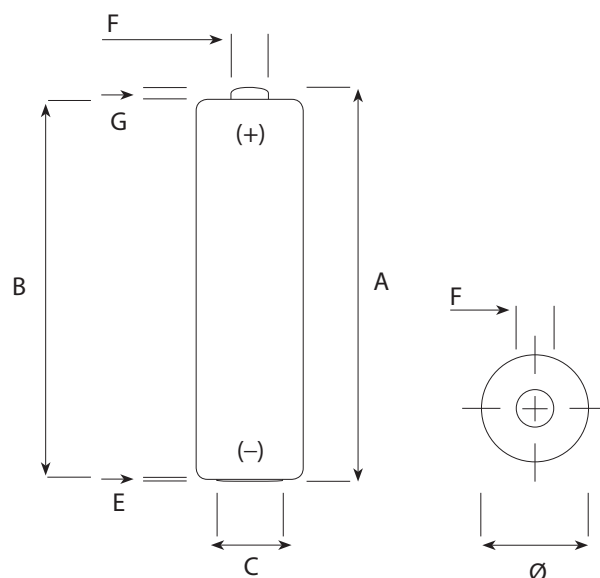

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	
B		49,2
C		7,0
E	0,5	
F	5,5	
G		1,0
Ø	14,5	13,5

Specifications

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	23,3 g
Storage temperature range	+10°C ~ + 25°C
Operating temperature range	-20°C ~ + 45°C
Average Impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation
	EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell

For more information:


www.panasonic-batteries.com

Panasonic
ideas for life


Typical discharge values

LR6


Radio: 4h/d 43 ohm end 0,9 V

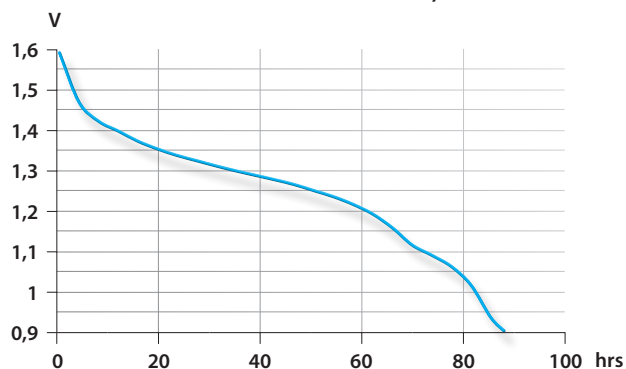


Recorder: 1h/d 10 ohm end 0,9 V

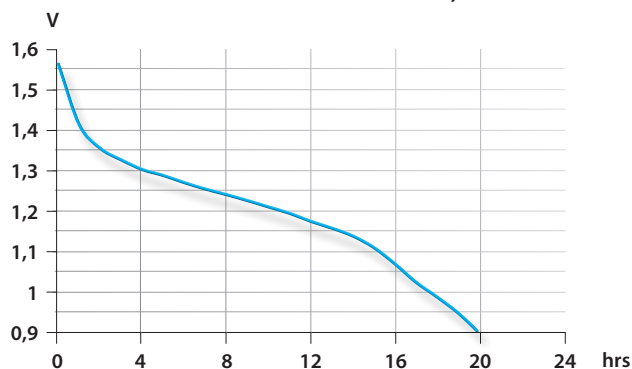


Motor: 1h/d 3,9 ohm end 0,8 V

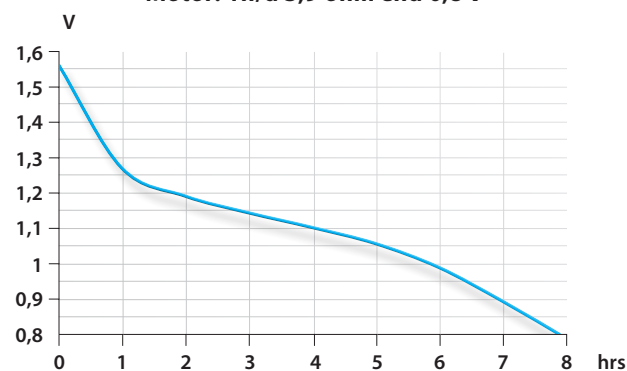


Remote Control: 15s/m 8h/d 24 ohm end 1,0 V

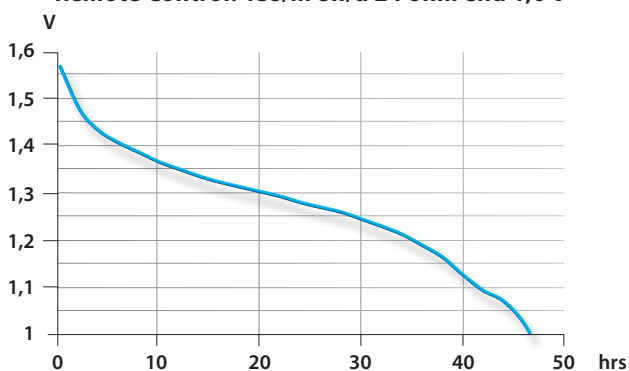

Photoflash: 10s/m 1h/d 1000 mA end 0,9 V

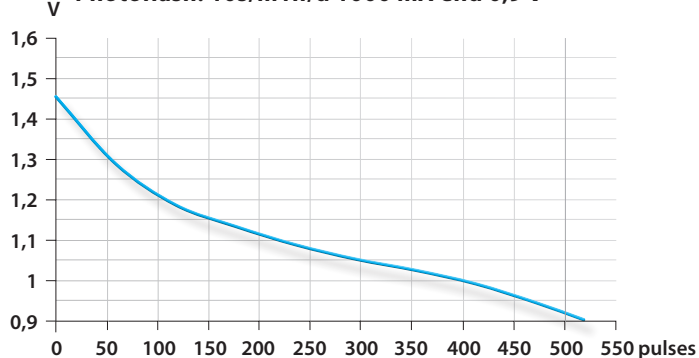

CD/MD: 1h/d 250 mA end 0,9 V

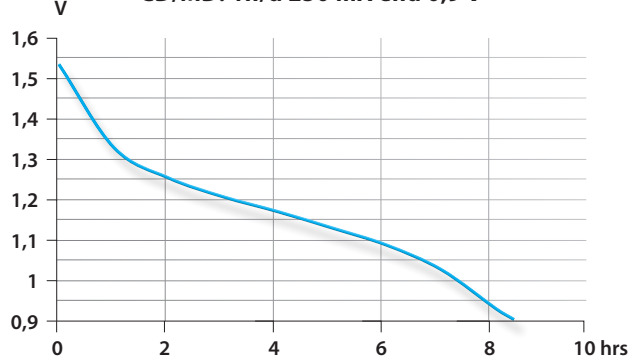

**DSC: 10x(2s 1,5W/28s 0,65W)
5min on/55min off, 24h/d end 1,05V**

